

Sales Catalog of HNK Telecommunication Products

Fiber Optic Patch Panel

Fiber Optic Patch Panel Series

Fiber optic patch panel is an integrated unit for fiber management, we offer wall mounted fiber optic patch panel and rack mounted fiber optic patch panels, these equipment function is to fix and manage the fiber optic cables inside the box as well as provide protection.

Made of Cold Rolled Steel with corrosion-resistant black powder finish coat housing provides excellent protection for the inside fibers. Since these adaptor plates are versatile, they can be tailored to suit your individual needs in terms of density or management. A large variety of connector adaptors are offered to meet your specific requirements. Such as SC, FC, ST, LC, etc., we can also pre-install various kinds of fiber optic pigtails inside the patch panel.

Standards Compliance

- TIA/EIA 568.C, ISO/IEC 11801, EN50173, IEC60304, IEC61754, EN297-1
- CE/EIA-310-E (Cabinets, Racks, Panels and Associated Equipment standard.)
- ANSI/TIA/EIA-606-A (Administration Standard for Telecommunications Infrastructure.)
- GR-449-CORE (Generic Requirements and Design Consideration for Fiber Distributing Frames.)
- UL 94 (Tests for Flammability of Plastic Material for Parts in Devices and Appliances.)
- RoHS (Directive on Restriction of Hazardous Substances.)

Features

- Available in 1RU, 2RU, and 4RU Configurations, light in weight and robust structure.
- Multiple internal mounting holes for cable tie-down, fiber management or splice tray mounting.
- Equipped with routing guides to limit bend radius. fiber optic cable bend radius not less than 40mm.
- Suitable for tight buffered or loose-tube optical fiber cables.
- With various adaptor plates to fit different fiber Connector interface (ordered separately).

Ordering Information

Using the available configurations amend/create product codes using the formula below.

Part Number: XX-AA-BBC(DEF)

Ordering Guide

XX	Patch Panel Type	WPP =Wall Mount Patch Panel, RPP =Rack Mount Patch Panel
AA	Product ID	Please See the Reference Below
BB	Port Capacity	12=12 Ports, 18=18 Ports, 24=24 Ports, 36=36 Ports
C	Configuration	E=only patch pane, L=With Adaptor Panels, F=With Adaptor Panels and Pigtails
D	Connector Type	FP, SP, SA, LP
E	Fiber Type	OM1=62.5/125 OM1, OM2=50/125 OM2, OM3=50/125 OM3, OM4=50/125 OM4, G652D=9/125 G652D, G657A=9/125 G657A
F	Fiber Length	05=0.5M, 10=1M, 20=2M

Connector Type Code

Code	Connector	Code	Connector	Code	Connector	Code	Connector
FP	FC/PC	FA	FC/APC	LP	LC/PC	LA	LC/APC
SP	SC/PC	SA	SC/APC	TP	ST/PC	TA	ST/APC

Sales Catalog of HNK Telecommunication Products


Fiber Optic Patch Panel

New 1U & 2U Rack Mount Patch Panel with Telescopic Rails (Panel Fastener Screw Type, RPP-APS)

RPP-APS provides professional cable management and ease of fiber termination with a cost effective mechanical pull-out mechanism. RPP-APS Panels are available with various designs.

The 19" Rack Mountable Panels come in 1U or 2U in height. The 1U Rack Mount Panel could accommodate 2 long adaptor plates and terminate a range of 12 to 24 fiber connection.

The high density 2U Rack Mount Panel could accommodate 4 long adaptor plates and terminate a range of 24 to 48 fiber connection.

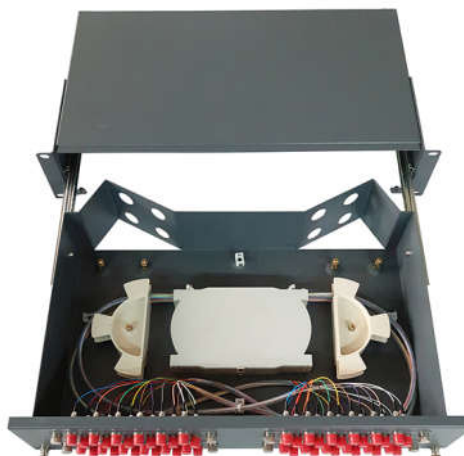

1U (RPP-APS1)

2U (RPP-APS2)

Features

- Easy access with Telescopic rail pull-out system.
- Providing protective connections for optical fibers and distribution pigtails.
- Insulating fiber metal components from fiber-end shells and conveniently leading out grounding wires.
- Providing spaces for placing fiber terminals and redundant fibers, thus making installation more convenient.
- 6-port or 12-port long adaptor plate, FC, SC, ST, LC connector are applied.
- Adaptor plate fixing assembly adopt screw combination fasteners, install more firmly.

Specifications

Patch Panel		Adaptor	
Size (H×W×D) mm	1U(H) x 19" (W) x 300mm(D) 2U(H) x 19" (W) x 300mm(D)	Multimode Insertion Loss	0.2dB Maximum
Material	1.2mm Cold Rolled Steel	Singlemode Insertion Loss	0.2dB Maximum
Material Coating	Powder	Mating durability	>500 Mating Cycles
Humidity	0-90%, non-condensing	Multimode Adaptor Wavelength	850 to 1300nm
Operating Temperature	-10°C to 60°C	Singlemode Adaptor Wavelength	1310 to 1550nm
Storage Temperature	-40°C to 85°C	ROHS Compliant	Yes

Ordering Sample

Part Number	Description
RPP-APS1-24FSPG652D10	1U 24 Fibers RPP-APS Type Rack Mount Patch Panel With Duplex SC/PC SM Adaptor And 1M Singlemode G652D SC/PC Pigtail.

Sales Catalog of HNK Telecommunication Products

Fiber Optic Patch Panel

Adaptor Plate Series

HNK offers two type of adaptor plates for use in different fiber optic patch panel. Long type adaptor plate and short type adaptor plate. Our standard plates come in 6-, 8- and 12-pack styles and are constructed with a durable powder coated finish. These plates offer users the ability to add terminations incrementally. Simple captive push/pull fasteners make these plates easy to install and remove for service.

Long type adaptor plates are pre-loaded with 6 (single density) or 12 (single density or double density) adaptor. A blank adaptor plate is also available and can be used with patch panel to fill in unused adaptor plate openings.

















Standards Compliance



Meets all applicable standards. Compliant with TIA/EIA-568-C.3

Features

- Offers flexibility in adding or changing connector style
- Captive push/pull fasteners allow for quick tool-less installation
- 6-, 8-, and 12-pack plates available, Blank plates available.
- Adaptor plates feature multiple style adaptors

Long Type Adaptor Plate

Part Number	Description	Drawing	
LAP-00	Blank Adaptor Plate		
LAP-06ST	Simplex ST Adaptors with Plate, Fully Loaded-6 Ports		
LAP-12ST	Simplex ST Adaptors with Plate, Fully Loaded-12 Ports		
LAP-06FC	Simplex FC (D type) Adaptors with Plate, Fully Loaded-6 Ports		
LAP-12FC	Simplex FC (D type) Adaptors with Plate, Fully Loaded-12 Ports		
LAP-06SC-CL	Simplex SC Adaptors with Plate, Fully Loaded-6 ports		
LAP-S12SC-CL	Simplex SC Adaptors with Plate, Fully Loaded-12 ports		
LAP-D12SC-CL	Duplex SC Adaptors with Plate, Fully Loaded-12 ports		

LAP-12LC-CL	Duplex LC Adaptors with Plate, Fully Loaded-12 ports		
-------------	--	--	---

Note:

"CL"=Color(CL), "BL"="Blue", "BG"="Beige", "AQ"="Aqua", "GR"="Green".

Blue for Singlemode PC Adaptor Standard, Beige for Multimode Adaptor Standard, Aqua for OM3/OM4 Adaptor Standard and green for single mode APC Adaptor(Metal unsuited).